




## Self-Powered Sub Bass

- Integrated DSP and remote control
- 3000w program power
- 4000w class D power amplifier
- dsp controled

### S18-i9

### POWER AMP.

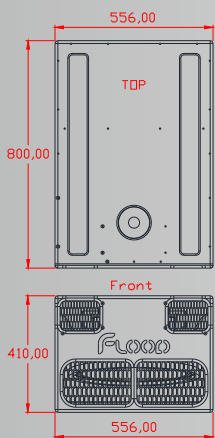

#### GENERAL SPECIFICATIONS

Charge Type	6 <sup>th</sup> order sub-woofer
POWER AES standard	1500W
PEAK POWER	3000W
COMPONENTS	1 CUSTOM 18"
FREQUENCY RESPONCE	25Hz-110Hz
SENSITIVITY	105 db
MAXIMUM SPL	136 db continuous, 144 db Peak
NOMINAL IMPEDANCE	8 Ohm
DISPERSION	OMNI
IDEAL Crossover Pointes	HPF 23Hz LPF 90 Hz
CONSTRUCTION	Heavily braced multi-laminated 18mm plywood finished with black texture paint
CONNECTORES	IN SIDE
NET WEIGHT	40Kg

#### GENERAL SPECIFICATIONS

OUTPUT POWER	2X 1000W 1x 2000W
INPUT SENSITIVITY	0.775v
THD	0.02 % A 8 Ohm
SLEW RATE	35V/us
VOLTAGE GAIN	54X
INPUT IMPEDANCE SYM/ASYM	20K/10K
DAMPING FACTOR	300
HUM AND NOISE	>-103db
CONNECTORES	2x XLR F AND (2+) AND 2xSPEAKON 4
INTERNAL CROSSOVER	DSP controled Time correction process
LIMITER	0-dbu
COOLING	VARIABLE SPEED FAN
PROTECTION	HIGH TEMPI SHORT CIRC/ DC/AUDIO LIMITER/ TURN-ON DELAY/INRUSH CURRENT LIMITER
POWER SUPPLY	3000 VA



Flood.Lda. - Rua S. Bento nº 186, Casais 3045-119 Coimbra - PORTUGAL

Tel: (00351) 239 048 656 (00351) 917343706 info@flood.pt www.flood.pt